

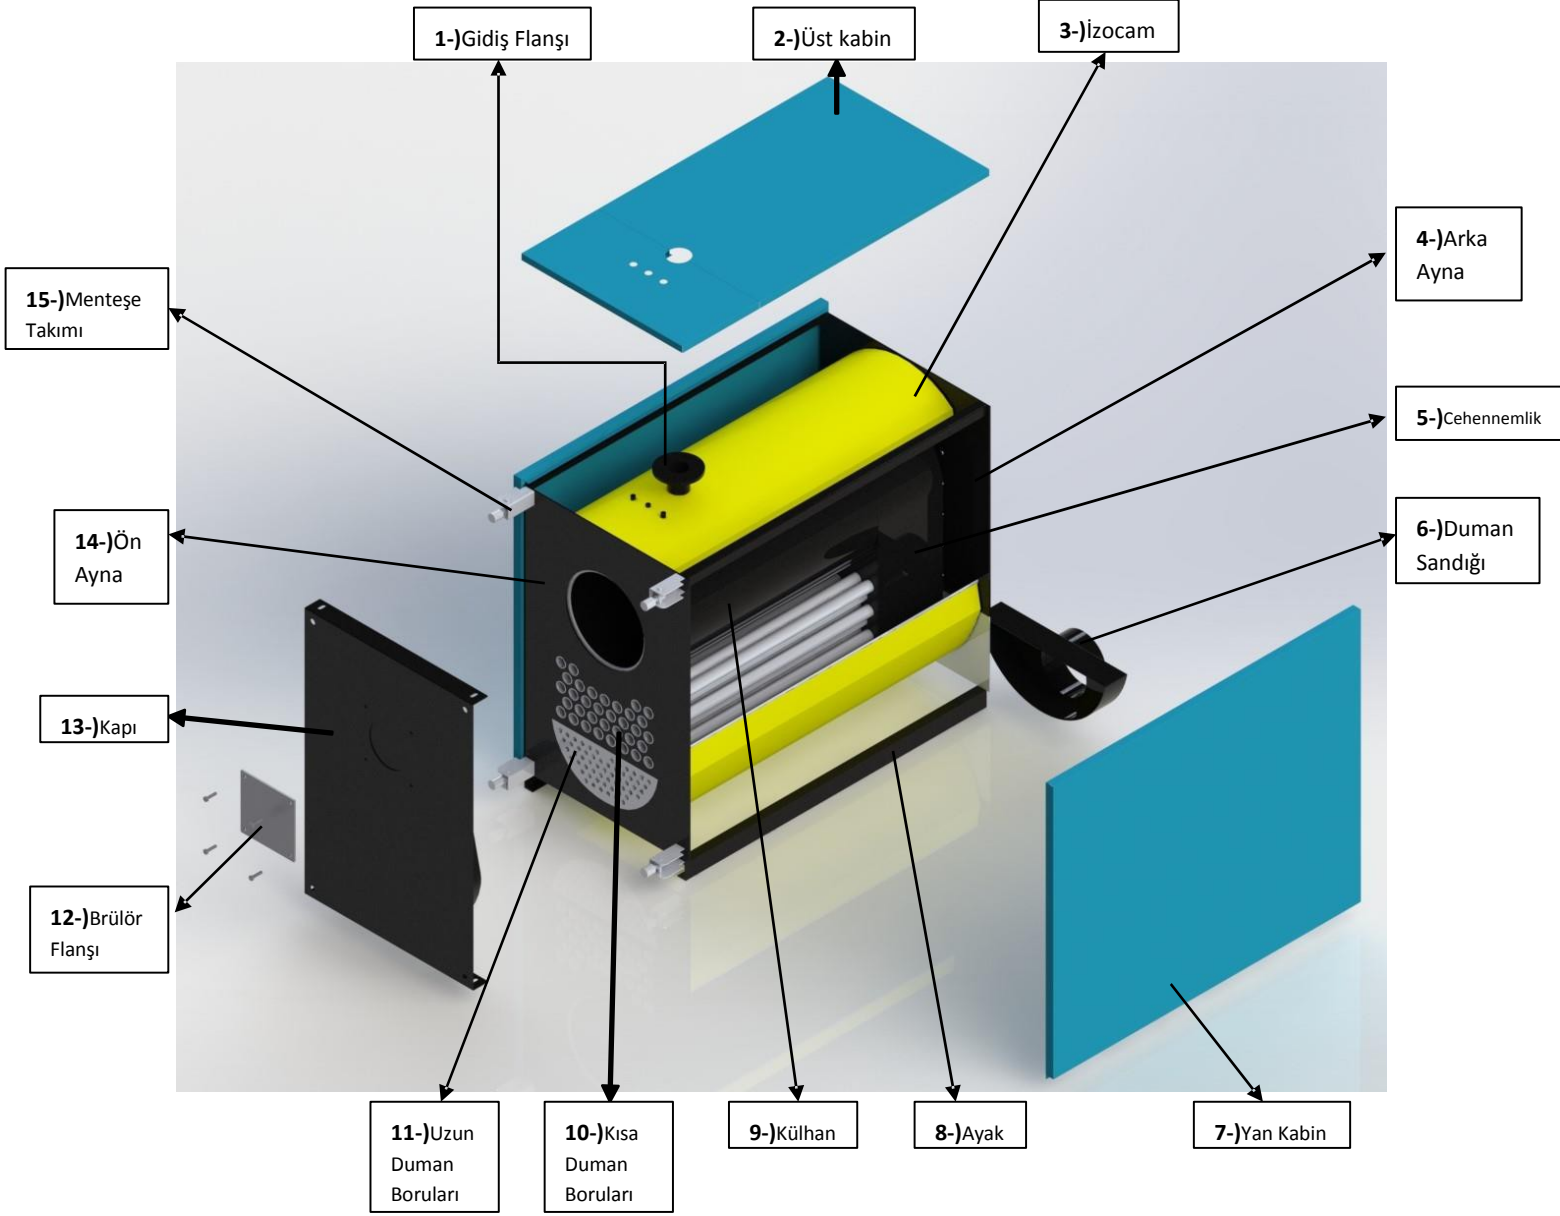
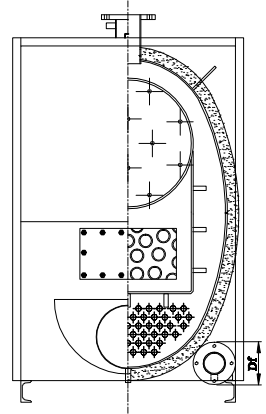


YSS PARÇALARI

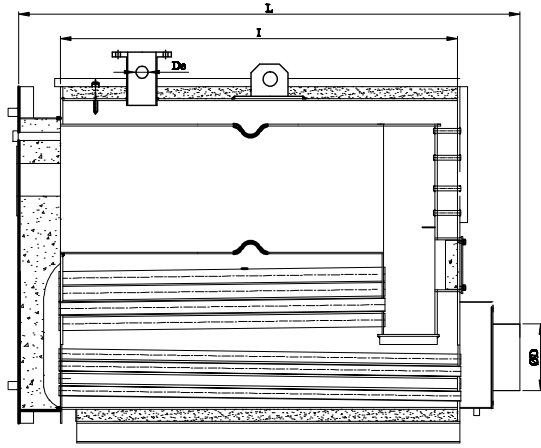

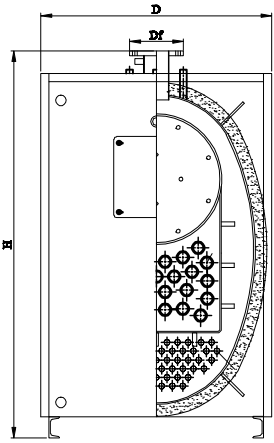

PRİZMATİK ÜÇ GEÇİŞLİ, GAZ YAKITLI, YOĞUŞMALI, SICAKSU KAZANI - PRISMATIC THREE PASS, GAS FUEL, CONDENSING, HOT BOILER

ÜRÜN KODU	ANMA ISI GÜCÜ		L	I	D	H	ØD	GİDİŞ-DÖNÜŞ	EMNİYET VENTİLİ	TAKRİBİ AĞIRLIK		GAZ TARAFI DİRENCİ	VERİM RAPORU (EFFICIENT)	
	TERMAL CAPACITY							OUTLET-INLET	SAFETY VALVE	WEIGHT (Kg)		BACK PRESSURE	Tam (full)	Kısmi (partial)
PRODUCT CODE	Kcal/h	kW	(mm)	(mm)	(mm)	(mm)	(mm)	Df (DN)	De (DN)	3 BAR	4 BAR	(mbar)	%	%
YSS 150	150 000	174	1577	1196	759	1167	200	DN65	DN 40	785	800	1,6	94,2	105,4
YSS 200	200 000	233	1782	1401	796	1291	200	DN65	DN 40	850	870	2,1	94,3	106,3
YSS 250	161 000	187	1577	1196	759	1167	150	DN65	DN 40	770	790	1,6	93,27	107,72
YSS 300	300 000	349	862	1483	862	1446	250	DN80	DN 50	1160	1200	3	95,2	105,6
YSS 400	400 000	465	1972	1583	954	1526	250	DN80	DN 50	1200	1250	3,3	94,2	106,5
YSS 450	318 000	370	1872	1491	816	1338	250	DN80	DN 50	1230	1260	3	93,91	106,69
YSS 500	500 000	581	2362	1972	1018	1546	300	DN100	DN 50	1440	1470	4,2	95,6	107,4
YSS 600	600 000	698	2362	1980	1099	1624	300	DN100	DN 65	1620	1650	4,4	96,1	106,7
YSS 700	700 000	814	1099	1980	1099	1704	350	DN100	DN 65	1700	1750	4,7	96,7	106,3
YSS 800	800 000	930	2362	1980	1149	1795	350	DN100	DN 65	1890	1930	4,8	95,2	107,1
YSS 900	900 000	1047	1861	2230	1149	2634	350	DN100	DN 65	2140	2200	5,2	96,7	107,2
YSS 1000	868 000	1009	2764	2360	1149	1861	350	DN100	DN 65	2350	2420	5,5	96,5	106
YSS 1200	1040 000	1209	2760	2380	1164	1954	350	DN125	DN 65	2470	2540	5,8	96,5	107,5
YSS 1350	1 175 000	1366	2835	2445	1161	1979	350	DN 125	DN 65	2600	2670	6	97,3	106,8
YSS 1500	1 310 000	1524	3000	2620	1191	2038	350	DN 125	DN 80	2730	2800	8	99,68	108,24